Installation Manual Guide



Plateau Roof Rack 2.0

Honda CR-V
2017 - 2022




Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

HONDA CR-V 2017 - 2022
PLATEAU ROOF RACK V.06302026

black ice SS HEX BOLT M6-1.00x16mm	HEX Coupler M6-1.00x18mm	Thick Stainless Steel Washer M6x3mm	M6 Flat Washer 1/4-20	black ice SS BHCS 1/4-20X0.75"	black ice SS nylock 1/4-20
4	4	4	66	36	16

Rear Mount Bracket	Front Mount Bracket	Weather Strip	Windbreak	Side Slat	Cross Bar
2	2	1	1	2	5

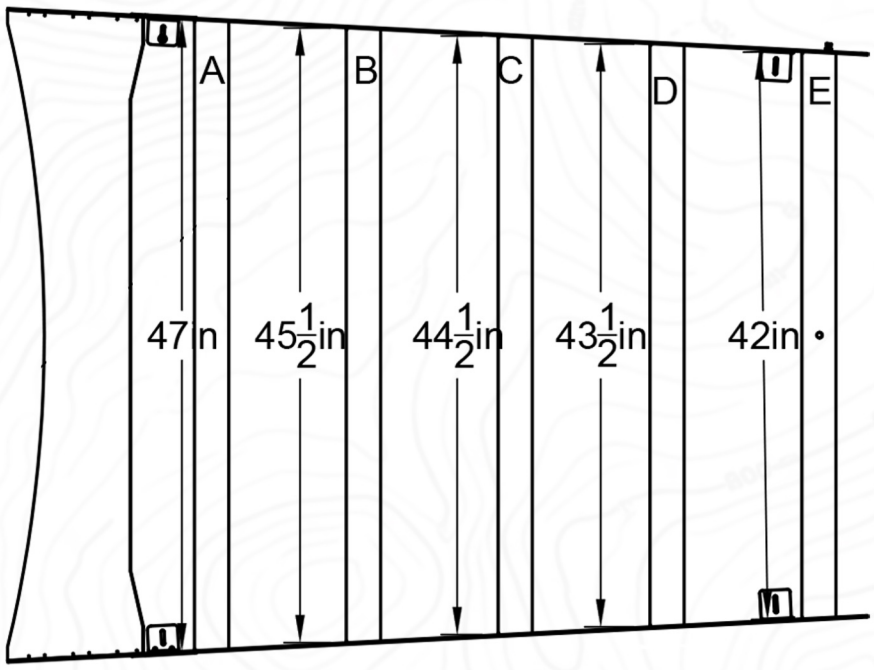


Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.


HONDA CR-V 2017 - 2022
PLATEAU ROOF RACK V.06302026

IMPORTANT
Rack Assembly


All 1/4" hardware when assembling the rack should utilize threadlocking compound (low strenght) and torque to 75 in-lbs

CROSSBAR/WIND BREAK/SLAT HARDWARE ORIENTATION

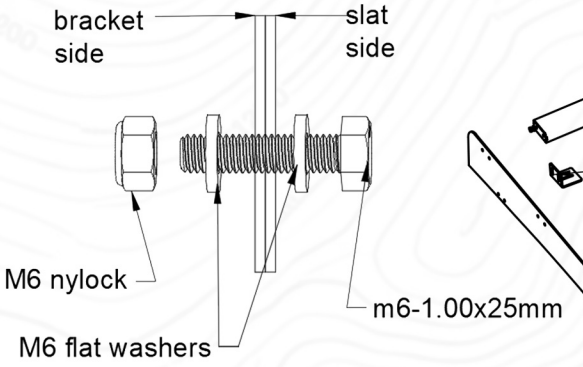

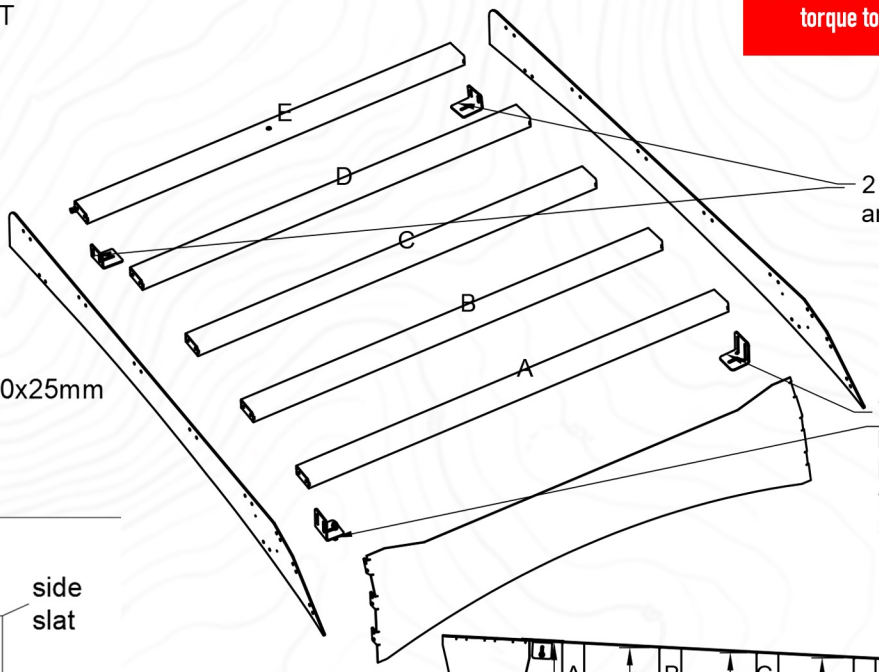


BRACKET HARDWARE ORIENTATION (same front to rear)

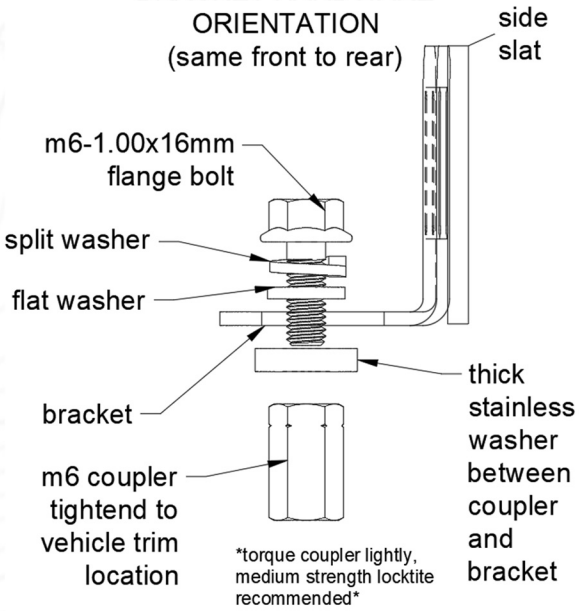

torque coupler lightly, medium strength locktite recommended

brackets	
F	front
R	rear

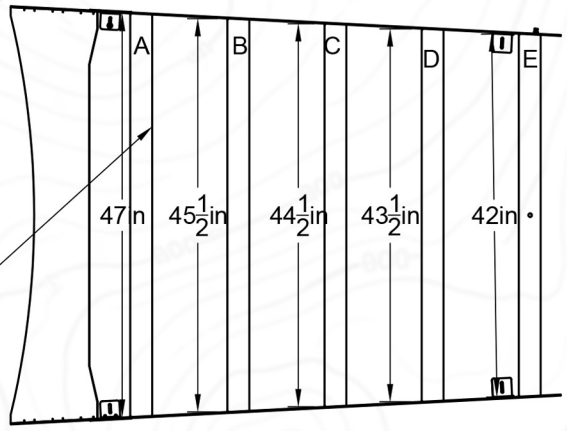

CROSSBAR ORIENTATION GOES FROM LARGEST TO SMALLEST, LARGEST BEING IN FRONT

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

1. Once you have assembled your rack, prepare your vehicle for this install. Access the factory mounting points by removing the trim covers. Remove factory roof rails if your vehicle has them. (CR-V requires you to remove and modify your factory weather strip.)

2. The CR-V rack comes with 5 cross bars, all of which are at a different length and have a taper to match the taper of the roof line going back. The longest bar goes in the front of the rack and the shortest goes to the rear.

3. Next, assemble the rack using the diagram from (Page 3) without the brackets (Use threadlocker and torque hardware to 75 in lbs).

4. The CR-V requires some roof rail cover modification to install the rack brackets. Mark, and cut the trim up to first bracket. Install the labeled brackets with the supplied hardware according to page 3 (Torque bracket to roof using 70 in lbs).

5. Utilizing a second person, lift the rack onto the top of the vehicle and fasten using supplied hardware to the existing installed brackets.

6. Once all the hardware fastened, torque all the hardware to spec and align the rack in the process.

Your new Jsport Plateau Roof Rack 2.0 is ready for action.



Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

WHAT IS COVERED

Jsport USA warrants all Jsport USA–manufactured products to be free from defects in materials and workmanship for the lifetime of the original retail purchaser. This Limited Lifetime Warranty remains in effect for as long as the original purchaser owns the product and is non-transferable.

All products must be installed and used in accordance with Jsport USA's recommended fitment and installation guidelines. Any modification, alteration, misuse, or deviation from the intended design or function of the product will void this warranty.

Warranty eligibility is determined at the sole discretion of Jsport USA.

Jsport USA may also offer third-party products that complement its product line. When purchased through Jsport USA, these items are covered exclusively by the original manufacturer's warranty.

Limited Coverage Items:
Hardware kits: 1-year limited warranty (considered wear items)

WHAT IS NOT COVERED

Subject to the limitations outlined herein, Jsport USA may, at its discretion, repair or replace defective products at no charge for parts or labor. Alternatively, Jsport USA may elect to issue a refund or store credit equal to the original purchase price.

This warranty does not cover:
Normal wear and tear
Cosmetic damage, including rust or scratches
Damage caused by accidents, misuse, neglect, or improper installation
Products used in racing or competitive environments
Unauthorized modifications or repairs
Improper maintenance or overloading
Failure to follow Jsport USA's installation or usage guidelines
Powder-coated finishes are specifically excluded from warranty coverage.

Jsport USA is not responsible for defects or damage resulting from conditions beyond its control.

DISCLAIMER OF LIABILITY

Repair, replacement, refund, or credit (as determined by Jsport USA) constitutes the sole and exclusive remedy under this warranty.

Jsport USA shall not be liable for any damage to vehicles, cargo, or other property, nor for any personal injury arising from the use or installation of its products.

This warranty is provided in lieu of all other warranties, express or implied, including but not limited to warranties of merchantability or fitness for a particular purpose.

Under no circumstances shall Jsport USA be liable for any indirect, incidental, special, consequential, or punitive damages, including but not limited to loss of profits or loss of use.

Customers are responsible for verifying product fitment and confirming all components are present prior to installation. Jsport USA is not responsible for additional shipping, labor, or installation costs incurred due to failure to verify components beforehand.

Any missing components must be reported within 90 days of receipt.

WARRANTY CLAIM PROCESS

All warranty claims require proof of purchase. A copy of the original invoice is required to initiate a claim.

Claims must be submitted via email to info@jsportusa.com. Phone submissions are not accepted.

Once approved, a Return Merchandise Authorization (RMA) number will be issued. Products must be returned with the RMA clearly marked on the shipping label and packaging.

Customers are responsible for return shipping costs unless otherwise specified. Jsport USA is not liable for items lost or damaged during transit—use a trackable and insured shipping method.

GENERAL WARNING

Neither the manufacturer nor the seller shall be liable for any loss, damage, or injury resulting directly or indirectly from the use or misuse of these products. The user is solely responsible for determining product suitability and assumes all associated risks.

POWDER COAT CARE

Proper care will extend the life and appearance of powder-coated finishes:
Avoid harsh chemicals, solvents, and petroleum-based cleaners
Use mild soap, warm water, and a soft cloth or brush
Rinse with clean, filtered water when possible
Clean regularly to prevent buildup and surface degradation
Use low-pressure settings when pressure washing

Environmental exposure and maintenance practices will affect the lifespan of the finish, which cannot be precisely predicted.

ANODIZED PRODUCT CARE

Select Jsport USA components utilize anodized aluminum.

To preserve the finish:
Avoid abrasive materials and harsh chemicals
Do not use acidic or alkaline cleaners
Avoid high pH environments, including certain touchless car washes
Clean using mild soap and water only
Improper care may result in discoloration or surface damage.

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.