JSPORTUSA.COM

V.10282026

# Installation Manual Guide



## Mirror Light Instructions

## Honda Passport
## 2026 - Current





2 Baja Designs Squadron 2.0 Sport LED Light Pods

OR



2 Baja Designs S2 LED Light Pods

---

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

JSPORTUSA.COM

V.10282026

# WHAT'S INCLUDED



(2) - Baja Designs S2 Lights

OR



(2) - Baja Designs Squadron 2.0 Sport LED Light Pods



(2) - Inner Brackets



(2) - Vanity Brackets



(1) - Full Length Harness w/ switch

## Tools (Not included)

10mm socket wrench

Plastic pry tool

Stepped drill bit

---

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

V.10282026



1.

Layout all included parts and brackets as well as tools needed for install. Use “Whats included” page as a reference.

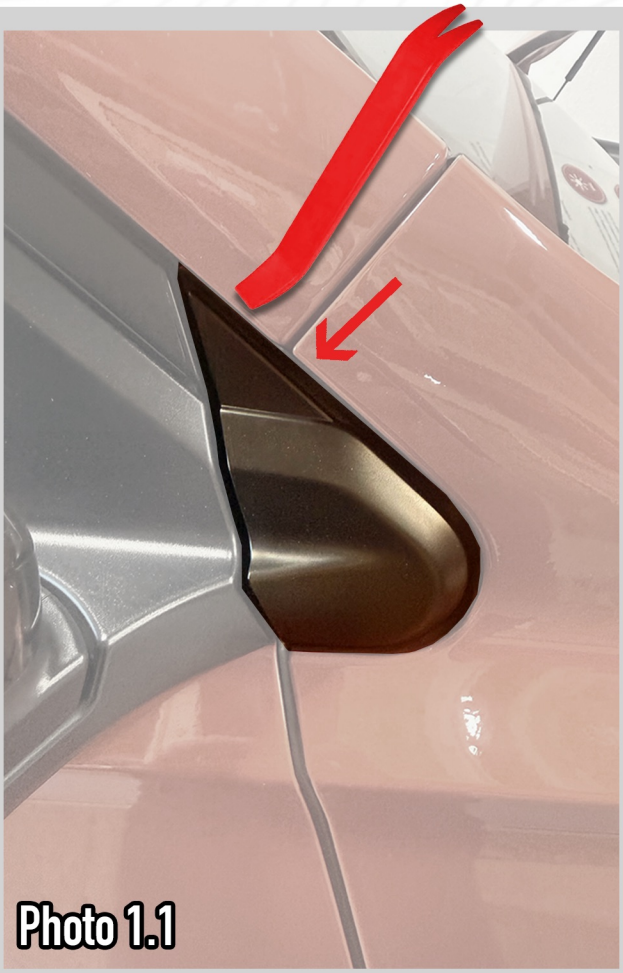


Photo 1.1

2.

- Remove black plastic trim piece by opening door and gently prying behind it with non marring tool. (Photo 1.1 & 1.2)



Photo 1.2

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.


Photo 2.1

3 . Use coat hanger or similar fishing tool to run wire from engine bay to mirror cavity.


Photo 2.2


Photo 2.3

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

V.10282026


Photo 3.1

4. After you ran power wire through fender, plug in your light and run it back into fender as pictured. (Photo 3.1)

5, Remove fender bolt using 10mm wrench and bolt in first part of bracket, routing the wire as shown, once tightened, there will still be enough space to push wire in as needed. (Photo 3.3)

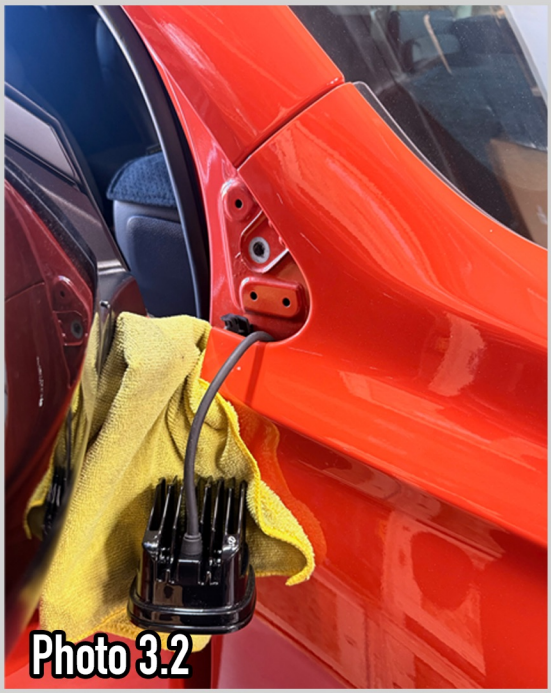

Photo 3.2


Photo 3.3

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.



Photo 4.1

5. Place outer beauty plate as shown. (Photo 4.1)

6. You can then bolt in your light and push wire in tight. (Photo 4.2)




Photo 4.2

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.


Photo 5.1

7. You can route the wire how you want but the preferred method is to Remove plastic pin as shown, pull toward front of vehicle and lift up trim to fit wire underneath to run to the driver side by the battery. Repeat for driver side light. (Photo 5.1 , 5.2 , 5.3)


Photo 5.2

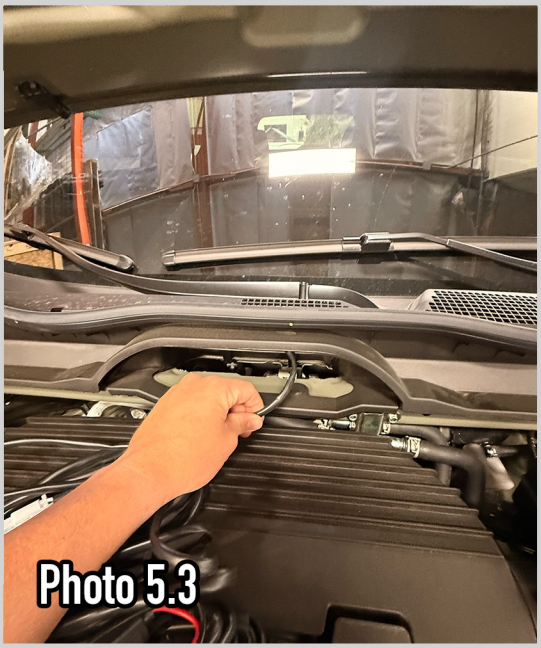
Photo 5.3

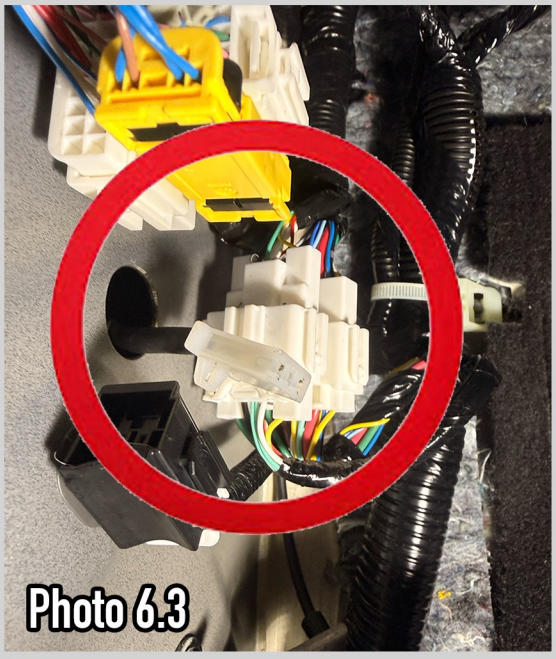
Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.


Photo 6.1

8. Unplug the switch from the harness so it looks as shown (6.1) and run through driver fender using same coat hanger fishing method and run through rubber grommet as shown (6.2)

9. Remove plastic kick pannel on inside of vehcile, this unclips easily with a pull. Drill hole with stepped bit shown in (6.3), you may want to drill this before doing step 8 as to not possibly damage wire. Then run wire through hole.


Photo 6.2


Photo 6.3

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.


Photo 7.1

8. Remove plastic swtich cover from switch housing (Photo 7.1) This will come out easily with a small scew driver or a small pry tool, then run the switch wire from the top down to plug that you ran through the fender. (Photo 7.2)


Photo 7.2

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.



Photo 8.1


9. Then use stepped drill bit to drill hole in plastic cover and insert switch as shown, then re-install into dash. Tuck wires and re-install interior plastics.


Photo 8.2

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.




10. Remove intake resonator as shown (Photo 9.1) You can then tuck relay behind fuse box and run power wires underneath to the battery, there will be pleanty of length to do so (Photo 9.2).

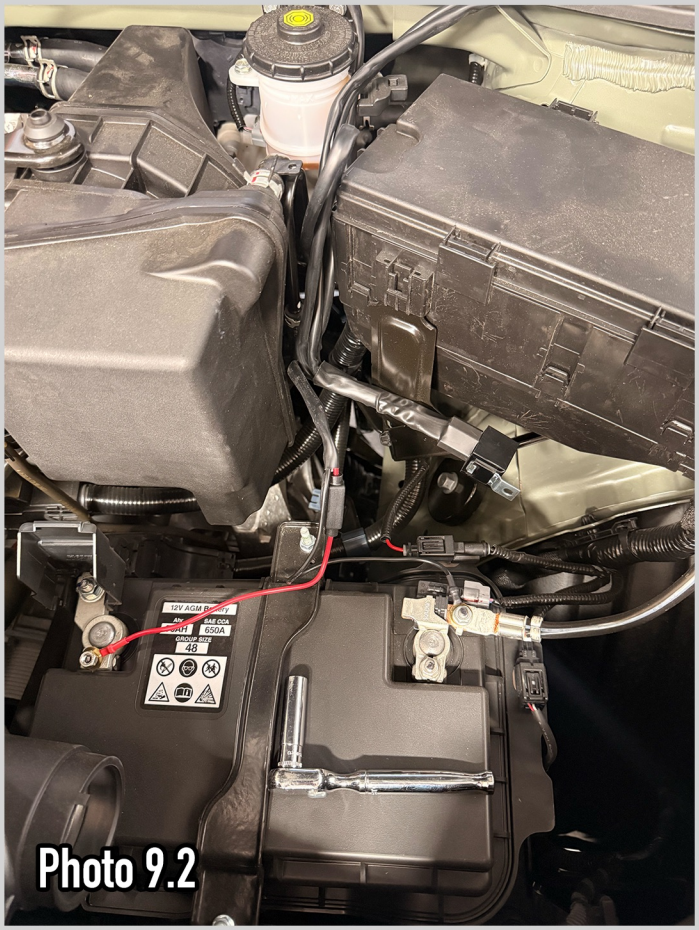


Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

## 11. You're ready to go.




Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

JSPORTUSA.COM

# WARRANTY AND PRODUCT CARE POLICY

V.10282026

## WHAT IS COVERED

Jsport USA warrants all Jsport USA–manufactured products to be free from defects in materials and workmanship for the lifetime of the original retail purchaser. This Limited Lifetime Warranty remains in effect for as long as the original purchaser owns the product and is non-transferable.

All products must be installed and used in accordance with Jsport USA's recommended fitment and installation guidelines. Any modification, alteration, misuse, or deviation from the intended design or function of the product will void this warranty.

Warranty eligibility is determined at the sole discretion of Jsport USA.

Jsport USA may also offer third-party products that complement its product line. When purchased through Jsport USA, these items are covered exclusively by the original manufacturer's warranty.

**Limited Coverage Items:**
Hardware kits: 1-year limited warranty (considered wear items)

## WHAT IS NOT COVERED

Subject to the limitations outlined herein, Jsport USA may, at its discretion, repair or replace defective products at no charge for parts or labor. Alternatively, Jsport USA may elect to issue a refund or store credit equal to the original purchase price.

This warranty does not cover:
Normal wear and tear
Cosmetic damage, including rust or scratches
Damage caused by accidents, misuse, neglect, or improper installation
Products used in racing or competitive environments
Unauthorized modifications or repairs
Improper maintenance or overloading
Failure to follow Jsport USA's installation or usage guidelines
Powder-coated finishes are specifically excluded from warranty coverage.

Jsport USA is not responsible for defects or damage resulting from conditions beyond its control.

## DISCLAIMER OF LIABILITY

Repair, replacement, refund, or credit (as determined by Jsport USA) constitutes the sole and exclusive remedy under this warranty.

Jsport USA shall not be liable for any damage to vehicles, cargo, or other property, nor for any personal injury arising from the use or installation of its products.

This warranty is provided in lieu of all other warranties, express or implied, including but not limited to warranties of merchantability or fitness for a particular purpose.

Under no circumstances shall Jsport USA be liable for any indirect, incidental, special, consequential, or punitive damages, including but not limited to loss of profits or loss of use.

---

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

JSPORTUSA.COM

# WARRANTY AND PRODUCT CARE POLICY

V.10282026

Customers are responsible for verifying product fitment and confirming all components are present prior to installation. Jsport USA is not responsible for additional shipping, labor, or installation costs incurred due to failure to verify components beforehand.

Any missing components must be reported within 90 days of receipt.

## WARRANTY CLAIM PROCESS

All warranty claims require proof of purchase. A copy of the original invoice is required to initiate a claim.

Claims must be submitted via email to info@jsportusa.com. Phone submissions are not accepted.

Once approved, a Return Merchandise Authorization (RMA) number will be issued. Products must be returned with the RMA clearly marked on the shipping label and packaging.

Customers are responsible for return shipping costs unless otherwise specified. Jsport USA is not liable for items lost or damaged during transit—use a trackable and insured shipping method.

## GENERAL WARNING

Neither the manufacturer nor the seller shall be liable for any loss, damage, or injury resulting directly or indirectly from the use or misuse of these products. The user is solely responsible for determining product suitability and assumes all associated risks.

## POWDER COAT CARE

Proper care will extend the life and appearance of powder-coated finishes:
Avoid harsh chemicals, solvents, and petroleum-based cleaners
Use mild soap, warm water, and a soft cloth or brush
Rinse with clean, filtered water when possible
Clean regularly to prevent buildup and surface degradation
Use low-pressure settings when pressure washing

Environmental exposure and maintenance practices will affect the lifespan of the finish, which cannot be precisely predicted.

## ANODIZED PRODUCT CARE

Select Jsport USA components utilize anodized aluminum.

To preserve the finish:
Avoid abrasive materials and harsh chemicals
Do not use acidic or alkaline cleaners
Avoid high pH environments, including certain touchless car washes
Clean using mild soap and water only
Improper care may result in discoloration or surface damage.

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.