
JSPORTUSA.COM

V.09242026

Installation Manual Guide

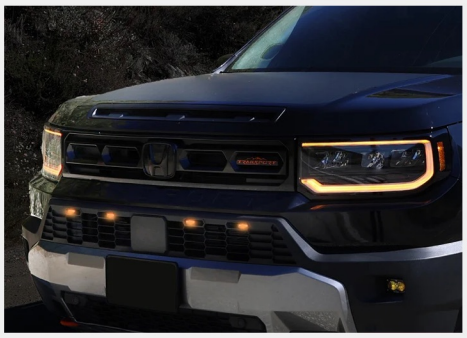

Marker Light Kit

Honda Passport
2026 - Current



Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

JSPORT
JSPORTUSA.COM

V.09242026

WHATS INCLUDED



(4) Marker LED Marker Lights w/ bezel



(1) Short Harness



(1) Headlight Jumper Harness




(1) Relay Harness



(1) Long Harness



(1) M6 Nut and Bolt



(10) Zip Ties

(10) Sticky Pads

Included parts and the tools needed for install.

(4) Marker LED Marker Lights w/ bezel
(1) Long Harness
(1) Short Harness
(1) Relay Harness
(1) Headlight Jumper Harness
(10) Zip ties
(10) Sticky pads
(1) M6 Nut and Bolt

Tools (Not included)

Flush cuts
10mm socket & Wrench
Alcohol cleaning wipe

Note: Turn off the vehicle and keep key fob at a distance during installation

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

V.09242026



1.
Layout all included parts and harness as well as tools needed for install. Use “Whats included” page as a reference.


Photo 1.1


2.
- Remove coolant overflow tank (Photo 1.1)
- Remove Resonator (Photo 1.2)
- Remove Front Radiator sill plate (Photo 1.3)


Photo 1.2


Photo 1.3

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.


V.09242026

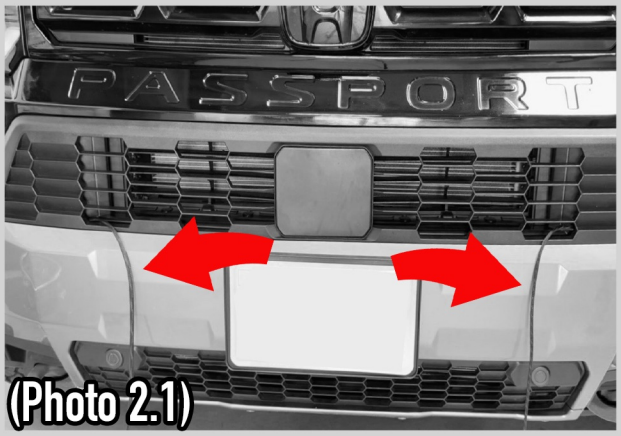

(Photo 2.1)

3. Feed Long harness into the passenger side of the lower grill and the short harness through the driver side of the lower grill. Harnesses will hang feely. Note: It is important that the correct harness is on the correct side. (Photo 2.1)


(Photo 2.2)

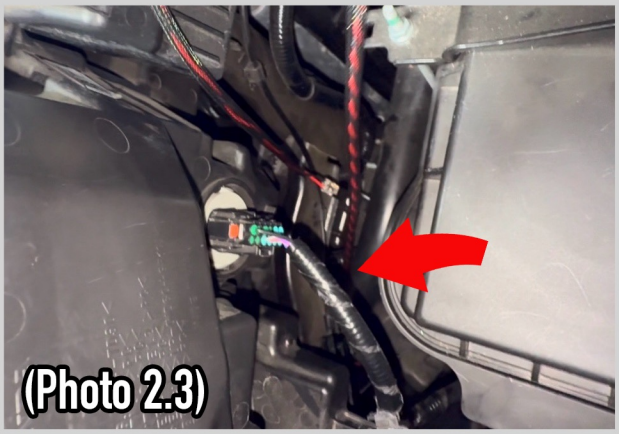
(Photo 2.3)


(Photo 2.4)

4. Install the marker lights into the grill by clipping in the outer light bezel. Note: Its important to orient the lights correctly as shown in (Photo 2.4)

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

V.09242026

5. Plug Marker lights into the freely hanging harnesses. Then use (4) sticky pads and Zip ties to secure the harness inside the top surface of the grill. Make sure to use an alcohol like cleaning solution to clean the inside surface before applying the pads. Note: It is important that the harness is secured from visibility and not interfering with anything. (See Photo 3.1, 3.2 & 3.3)

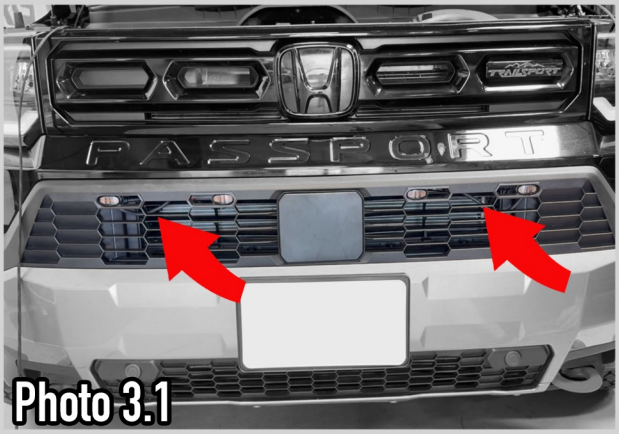


Photo 3.1



Photo 3.2

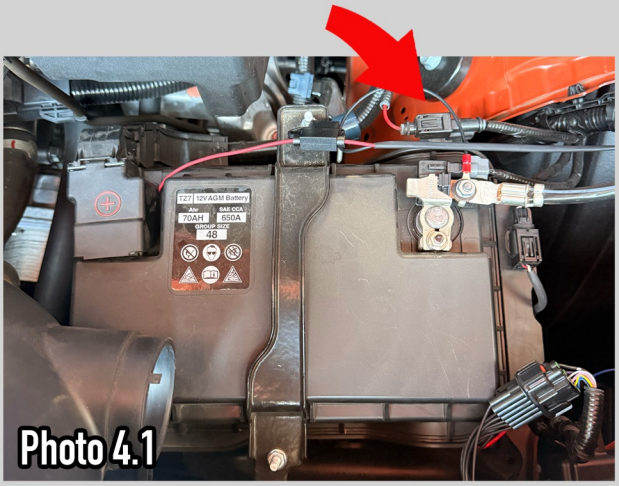


Photo 3.3

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.


V.09242026


6. Take the Relay harness and bolt to the location pictured (Photo 4.1) using the provided hardware. Next, route the long harness wire up loosely onto the top of radiator. While remaining loose, plug the long and short harness into the relay harness.



IMPORTANT NOTE: ADDITIONAL AUXLIARY PLUG NOT USED FOR FUNCTION OF MARKER LIGHTS



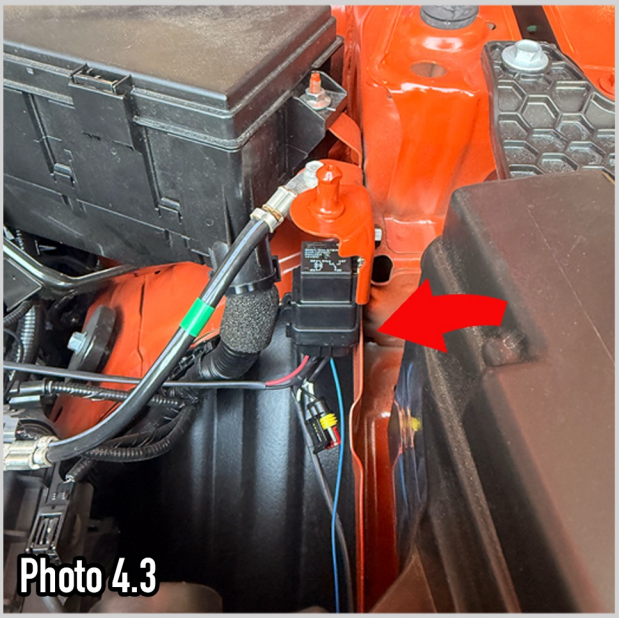

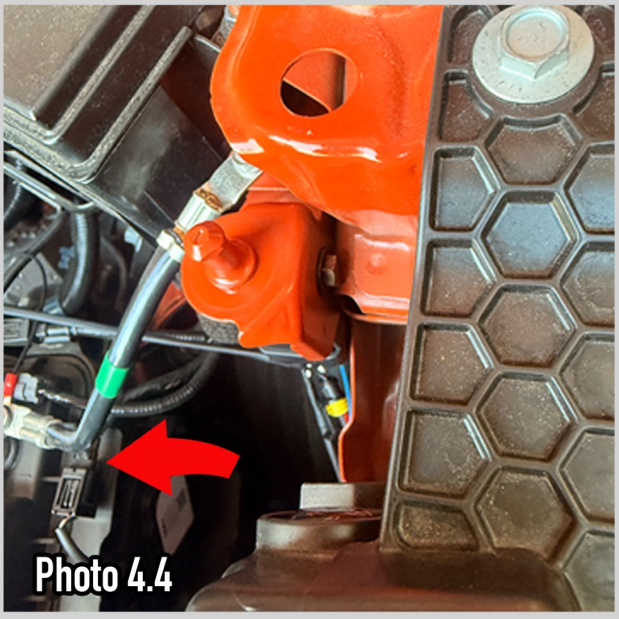

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.


Photo 5.1

7. Unplug the driver side headlight connector. Then, use the Jsport headlight adaptor harness and plug it into the drivers side headlight. Next, Plug the OE headlight connector into the remaining side of the Jsport headlight harness. (Photo5.1) Take the RED headlight adaptor harness wire and plug it into the BLUE wire from the installed relay harness. Lastly, turn on the ignition to verify the lights are luminating.

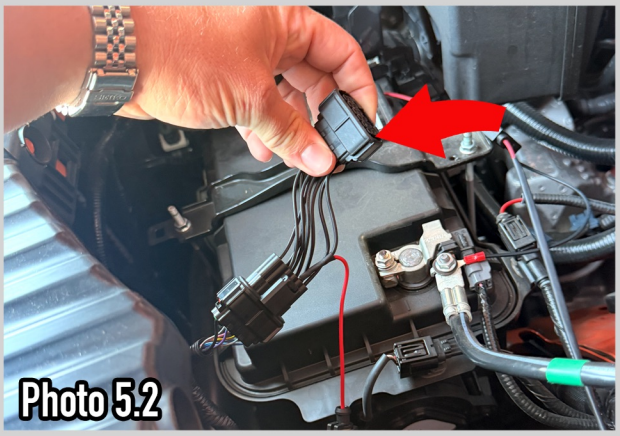

Photo 5.2


Photo 5.3

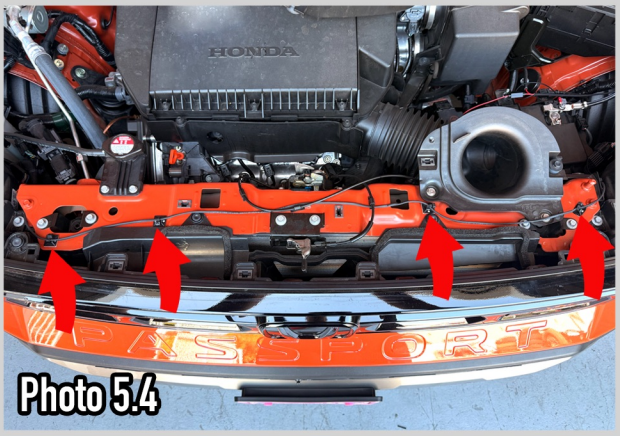


Photo 5.4

8. Finish routing the wiring harness above the radiator using the sicky pads and zip ties. Note: Make sure to use an alcohol like cleaning solution to clean the surface before applying the pads (Photo 5.4)

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.


Photo 6.1

9.

- Reinstall coolant overflow tank (Photo 6.1)
- Reinstall Resonator (Photo 6.2)
- Reinstall Front Radiator sill plate (Photo 6.3)


Photo 6.2


Photo 6.3


Photo 6.4

10. Good to go! To test functionality of lights, <u>double tap</u> the push to start buttion without foot on brake. (Ignition must be on for Marker Lights to illuminate) (Photo 6.4)

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

JSPORTUSA.COM

WARRANTY AND PRODUCT CARE POLICY

V.09242026

WHAT IS COVERED

Jsport USA warrants all Jsport USA–manufactured products to be free from defects in materials and workmanship for the lifetime of the original retail purchaser. This Limited Lifetime Warranty remains in effect for as long as the original purchaser owns the product and is non-transferable.

All products must be installed and used in accordance with Jsport USA's recommended fitment and installation guidelines. Any modification, alteration, misuse, or deviation from the intended design or function of the product will void this warranty.

Warranty eligibility is determined at the sole discretion of Jsport USA.

Jsport USA may also offer third-party products that complement its product line. When purchased through Jsport USA, these items are covered exclusively by the original manufacturer's warranty.

Limited Coverage Items:
Hardware kits: 1-year limited warranty (considered wear items)

WHAT IS NOT COVERED

Subject to the limitations outlined herein, Jsport USA may, at its discretion, repair or replace defective products at no charge for parts or labor. Alternatively, Jsport USA may elect to issue a refund or store credit equal to the original purchase price.

This warranty does not cover:
Normal wear and tear
Cosmetic damage, including rust or scratches
Damage caused by accidents, misuse, neglect, or improper installation
Products used in racing or competitive environments
Unauthorized modifications or repairs
Improper maintenance or overloading
Failure to follow Jsport USA's installation or usage guidelines
Powder-coated finishes are specifically excluded from warranty coverage.

Jsport USA is not responsible for defects or damage resulting from conditions beyond its control.

DISCLAIMER OF LIABILITY

Repair, replacement, refund, or credit (as determined by Jsport USA) constitutes the sole and exclusive remedy under this warranty.

Jsport USA shall not be liable for any damage to vehicles, cargo, or other property, nor for any personal injury arising from the use or installation of its products.

This warranty is provided in lieu of all other warranties, express or implied, including but not limited to warranties of merchantability or fitness for a particular purpose.

Under no circumstances shall Jsport USA be liable for any indirect, incidental, special, consequential, or punitive damages, including but not limited to loss of profits or loss of use.

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.

JSPORTUSA.COM

WARRANTY AND PRODUCT CARE POLICY

V.09242026

Customers are responsible for verifying product fitment and confirming all components are present prior to installation. Jsport USA is not responsible for additional shipping, labor, or installation costs incurred due to failure to verify components beforehand.

Any missing components must be reported within 90 days of receipt.

WARRANTY CLAIM PROCESS

All warranty claims require proof of purchase. A copy of the original invoice is required to initiate a claim.

Claims must be submitted via email to info@jsportusa.com. Phone submissions are not accepted.

Once approved, a Return Merchandise Authorization (RMA) number will be issued. Products must be returned with the RMA clearly marked on the shipping label and packaging.

Customers are responsible for return shipping costs unless otherwise specified. Jsport USA is not liable for items lost or damaged during transit—use a trackable and insured shipping method.

GENERAL WARNING

Neither the manufacturer nor the seller shall be liable for any loss, damage, or injury resulting directly or indirectly from the use or misuse of these products. The user is solely responsible for determining product suitability and assumes all associated risks.

POWDER COAT CARE

Proper care will extend the life and appearance of powder-coated finishes:
Avoid harsh chemicals, solvents, and petroleum-based cleaners
Use mild soap, warm water, and a soft cloth or brush
Rinse with clean, filtered water when possible
Clean regularly to prevent buildup and surface degradation
Use low-pressure settings when pressure washing

Environmental exposure and maintenance practices will affect the lifespan of the finish, which cannot be precisely predicted.

ANODIZED PRODUCT CARE

Select Jsport USA components utilize anodized aluminum.

To preserve the finish:
Avoid abrasive materials and harsh chemicals
Do not use acidic or alkaline cleaners
Avoid high pH environments, including certain touchless car washes
Clean using mild soap and water only
Improper care may result in discoloration or surface damage.

Jsport USA products are designed for off-road use and adventure. For the best experience, please assemble, install, and use all products according to Jsport USA's recommendations. Your safety and the safety of those around you is important to us. Always use good judgment and be mindful of your environment when using Jsport USA products. By installing these products on your vehicle, you accept responsibility for their use. Jsport USA is not liable for any damage or loss related to installation or use. To keep your adventures safe and enjoyable, avoid overloading your vehicle, as this can impact handling and performance. Keep in mind that carrying gear especially on roof mounted systems will change how your vehicle drives. When transporting heavier or wind-resistant loads, please drive with extra care. Take additional precautions when braking, turning, and driving in challenging conditions. Note for Dealers and Installers:
Please ensure that your customers receive clear instructions and guidance for the safe and proper use of these products.